



SANDFELD[®] AS
VÆRKTØJSMASKINER

Birkegårdsvej 2 · 7400 Herning · Denmark · Phone +45 97 11 92 22 · www.sandfeld.com

TS(X) SERIES

Hydraulic Guillotine Shears

Hydraulics and rake angle



All HACO shears are recognised for being well-built, accurate and cost effective, meeting the demand for the high precision sheet metal and heavy fabrication market to run small or high-volume production.

All our TS shears are equipped with power rake angle adjustment from the SP9 control panel and quick blade gap adjustment. Both 6 and 12 mm models are available with our SC200 control (TSX types). These machines are delivered with an extensive range of standard features.

The TS/TSX series shears remain the pacesetters in the price/quality ratio market of today. With thousands of units running day after day all over the world, we are convinced of the durability and craftsmanship of these machines.

Cutting angle/blade gap adjustment



TS/TSX shears are bottom driven by 2 pull-down cylinders. The hydraulic system consists of a motor pump unit and multi-function manifold block, conveniently located at the rear of the machine.

This compact assembly brings valves and hoses together, thus simplifying the system and eliminating troublesome leaks. The connections to the cylinders, the hold downs and pumps are by means of flexible hoses. Two high pressure relief valves protect the hold downs and the cutting cycle from overload. Oversized oil tank for trouble-free production shearing.



Adjustable rake angle

Electro-hydraulic adjustment of the rake angle by the control panel - SP9 with push buttons and digital readout or SC200 touch screen - allows thin material to be cut at less angle, minimising distortion of the cut material.



Auto blade gap (TSX)

Automatic blade gap adjustment in function of the material thickness by means of 2 hydraulic cylinders.



Hydraulic hold downs

The hydraulic hold downs work independently, which makes it possible to clamp plates of different lengths and thicknesses correctly. The hold downs operate independently from the shearing pressure.

On the left and the right hand side of the machine the hold downs are arranged more closely to allow cutting small plates without any problems.



Manual blade gap (TS)

Our quick blade gap adjustment is located conveniently in front of the machine.

Adjustment ranges from 0,05 mm blade gap for thin sheet thicknesses and progressively increases for heavier thicknesses up to the maximum shear capacity.

Standard features

Standard features of the TS(x)

- Hydraulic motor-pump group arranged at the rear of the machine.
- 2 under driven cylinders. Electro-hydraulic adjustment of the rake angle.
- All operator controls located within the immediate reach of the operator.
 - The TS comes standard with the SP9 control and offers the following functions:
 - Automatic positioning of the backgauge to the preselected position, stroke control, counter and selection for backgauge retraction
 - Quick blade gap setting
 - Tilting sheet hold downs, pressure of which is independant from the shearing pressure, in order to clamp each sheet thickness properly
 - Hydraulic and electric overload protection.
 - 4 edged cutting blades
 - Motorized backgauge 1000 mm on all models
 - Shearing table with a number of square iron blocks, for easy sheet feed-in and increasing operator's safety drastically.
 - Squaring arm of 1000 mm, with scale, T-slot and disappearing stop
- Movable foot pedal control
- Instruction and maintenance manuals
- Non-filled oil tank (due to environmental regulations)
- Service tools



TS comes standard with the SP9 control
TSX comes standard with the SC200 control



SC200 Control

Basic Features

- Simplified icon based programming with clear display architecture
- Personalised access codes with different access rights
- Pre-equipped for remote support
- Ethercat bus communication
- Integrated safety
- Based on new reliable German hardware

Optional Features

- Integrated optical finger protection control
- Integrated oil temperature control

Programming Modes

- **Automatic**
By entering the sheet thickness, the control automatically sets the blade gap and the cutting angle as a function of the sheet thickness. All parameters can be manually modified according to the actual data.
- **Manual**
All cutting parameters such as material type, sheet thickness, cutting angle and blade gap can be programmed manually.

Quick and easy

The **SC200** fits all requirements for sheet cutting operations that require the highest accuracy and minimum time-loss. Creating a program requires only a few actions. The program parameters include: backgauge position, cutting time, sheet thickness, blade angle & blade gap setting. The blade gap adjustment is done electro-hydraulically.

No specific training is required to work with this control!



Birkegårdsvej 2 · 7400 Herning · Denmark · Phone +45 97 11 92 22 · www.sandfeld.com

TSX 3012



Backgauge

The backgauge consists of 2 rigid arms (containing guides and control spindle) and the parallel adjustable backgauge bar. This assembly assures a precise positioning of the sheet.

Motorized positioning with the SP9 pre-selection control or programmable positioning with the SC200 control. Digital readout of the actual and pre-selected or programmed position.



Motorized backgauge (MOT)

Lateral movement front to back.
Standard on all models.
Powered backgauge, stroke 1000 mm.


Optional Rear Safety



Optional equipment

Optionals

- SC200 control unit (TSX type)
 - Pendant control panel (only with SC200 controller)
 - Squaring arms and front support arms
 - Full table with ball transfers
 - Protractor for angle shearing
- Blades for cutting stainless steel
 - Hand safety guard with hand gaps and safety light curtain guards
 - Hold downs with soft feet inserts and pressure regulation
 - Safety fences and light beams at the rear of the machine (necessary for countries requiring the CE safety specifications)

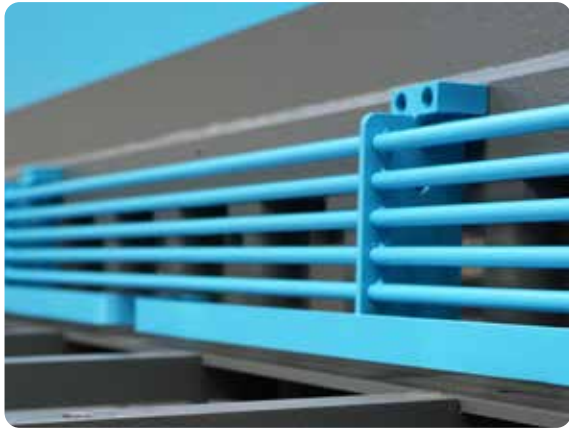

Hand safety guard with hand gaps for handling small sheets.



Ball transfers mounted in the iron table blocks, for easy feed-in of the sheets.



Protractor for angle shearing.




Squaring arms and front support arms with or without scale, T-slots and tilting stop. Lengths from 1000 up to 3000mm.



Technical specifications

	Capacity mild steel (400N/mm²) [mm]	Cutting length [mm]	Cutting angle [°]	Number of plate hold downs	Number of strokes/min at min. angle - max. angle	Length squaring arm [mm]	Stroke of backgauge MOT version [mm]	Working height [mm]	Motor Power [kW]	Length [mm]	Width (without CE safety fences) [mm]	Width (with CE safety fences) [mm]	Height [mm]	Approximate weight [kg]
2006	6	2050	0,5-3	13	10-15	1000	1000	770	7.5	2825	1905	2715	1660	3500
3006	6	3050	0,5-3	18	10-15	1000	1000	770	7.5	3840	1905	2715	1700	4500
3008	8	3050	0,5-3	18	6-17	1000	1000	830	15	4055	1905	2715	1830	5200
3012	12	3050	0.5-3	18	7-14	1000	1000	930	22.5	4180	2030	2800	2210	8500
	E				D				A		B	C		

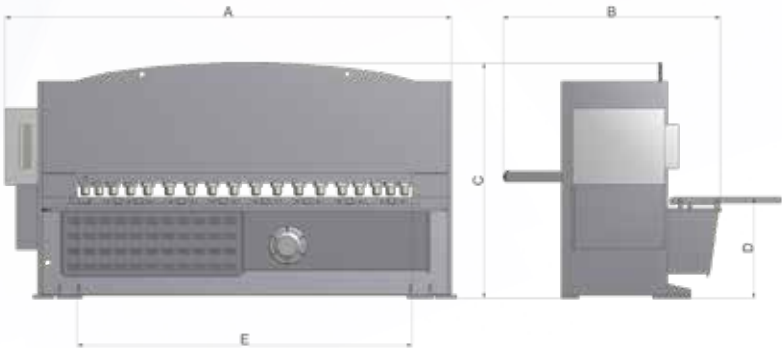



SANDFELD AS
VÆRKTØJSMASKINER

Birkegårdsvej 2 · 7400 Herning · Denmark · Phone +45 97 11 92 22 · www.sandfeld.com

ADVANCED TECHNOLOGIES, SINCE 1965



Bending



Robotics



Cutting



Shearing

With decades of experience and leading technologies, we are known for our high-quality customized solutions for sheet metal fabrication and machining. Whether laser cutting, bending or shearing, at HACO we offer precision, quality and innovation.



Customized solutions



Made in EU



Global reach



Local focus

Find out how we can take your shearing projects to the next level and view our extensive portfolio of success stories.



Machinery Masterminds

WWW.HACO.COM

HACO Offices:

HACO Belgium

Hogeschuurstraat 2
8850 Ardooie
Belgium
+32 (0)51 26 52 00
info@haco.com

HACO France

Parc d'activité de la Houssoye
Rue René Laënnec
59253 La Chapelle D'Armentières
France
+33 3 20 10 30 40
commercial@haco.fr

HACO Slovakia

Ulica 1. Mája 1850
031 80 Liptovský Mikuláš
Slovakia

HACO USA

11629 N. Houston Rosslyn Rd.
Houston, TX 77086
USA
+1 281 445-3985
sales.tx@hacoatlantic.com

HACO Australia

16 Argong Chase
Cockburn Central WA 6164
Australia
+61 0 8 9414 7382
sales@hacoaustralia.com.au

HACO India

Plot No. 122A, Sector 6
MT, Bawal, Distt. Rewari Haryana,
India, 123501
+919996246805
sales@haco-india.com

This catalog is not a contractual document and only for illustrative purposes. HACO reserves the right to modify any specifications within this catalog without prior notice.

TSX / 10.2024